



**PREFERRED  
POWER  
PRODUCTS**

# P3AC24-4-4L


Specification Sheet

4 Camera 24VAC 4Amp Power Supply

## DESCRIPTION

The P3AC24-4-4L is a UL listed CCTV power center engineered to manage remote camera and accessory power requirements. The P3AC24-4-4L distribution module is designed with 4 individually fused outputs for powering up to 4 CCTV cameras and accessories.


It will provide 24Volts AC via distribution to four fused outputs with a total of 4.0 Amps continuous supply current. The P3AC24-4-4L power center is housed in the premium P3 heavy gauge metal enclosure.

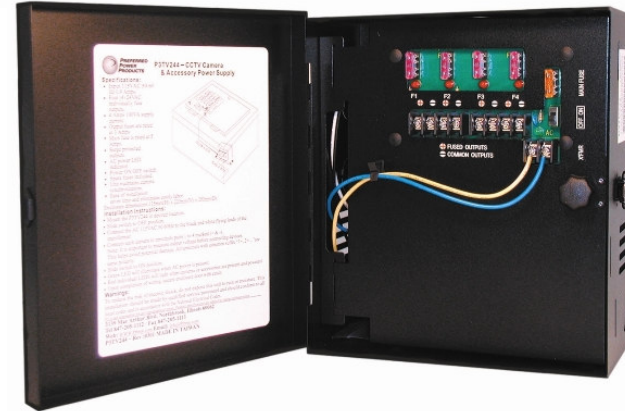

## FEATURES

- Convenient screw terminal and fuse access.
- Separation panel between transformers and output access.
- Power ON/OFF switch.
- AC power LED indicator.
- Individual LED's for each fused output.
- Lockable heavy gauge metal enclosure.
- Double coated polyurethane finish.
- Multiple knockouts to accommodate various wiring configurations.
- Uses easy to find automotive style fuses.
- Includes transformer and spare fuses.
- Available in 28VAC version (non - UL).
- Available with optional circuit breaker, **P3AC24-4-4CB** (non - UL).

## SPECIFICATIONS

- Input 115VAC 50/60 HZ; 0.9 Amps.
- Four 24VAC individually fused outputs.
- 4 Amps 100 VA supply current at 70°F.
- Output fuses are rated at 3 Amps.
- Main fuse is rated at 5 Amps.
- UL listed  us
- Unit maintains camera synchronization.
- Transformer: 110VAC/24VAC, 100VA.
- Enclosure dimensions: 10" (H) x 9" (W) x 4.5" (D).